


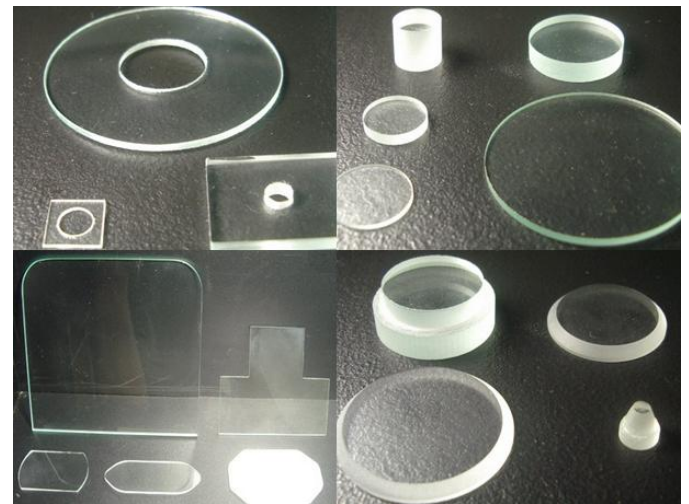


Oil level sight glass

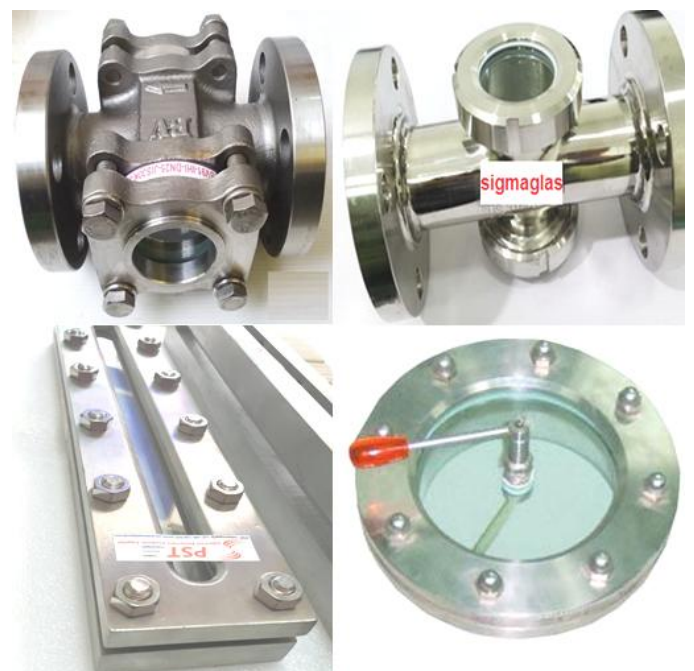

Sight Flow Indicator (Sight Glass)

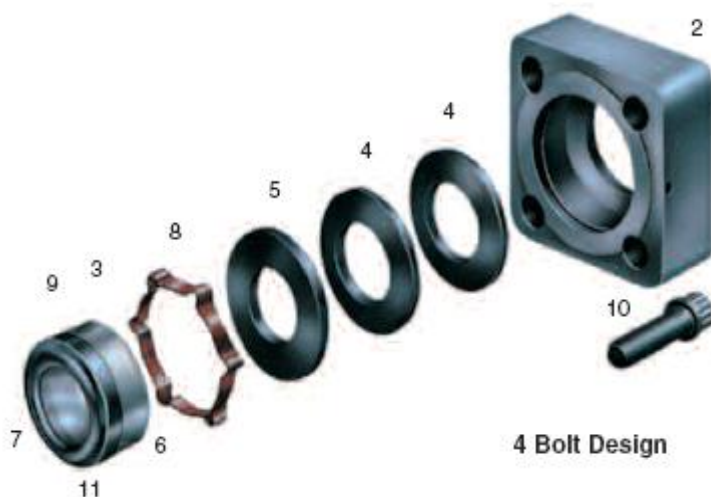

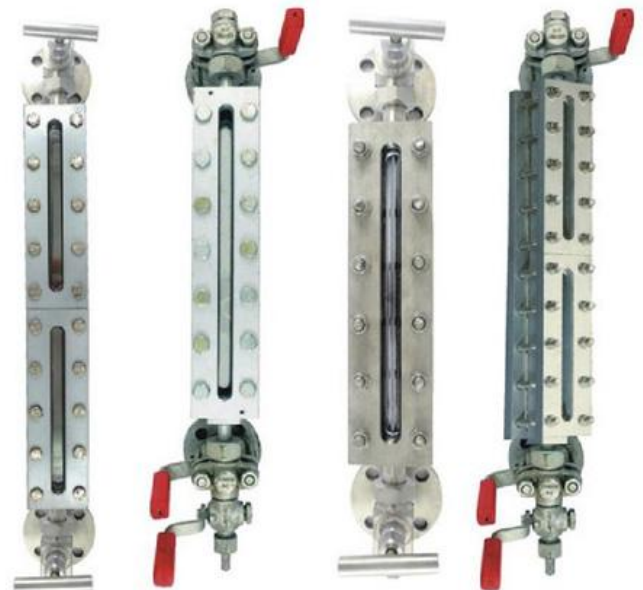

4 Bolt Design

Standard Parts

Item No.	Part	Part No.
1	Body	
2	Cover - 4 Bolt	112925
3	Glass	*
4	Spring Cone	102875-01
5	Washer	917211-01
6	Cushion Gasket	*
7	Clip Ring	*
8	Retaining Ring	919051
9	Mica	*
10	Cap Screw	954181-10
11	Sealing Gasket	*

*Supplied in kit form. Kit number 923321.
High pressure gage (4-bolt covers).



Sanitary Sight glass Union Type



Stainless steel shell, DC24V power supply

Charging/cable power supply, flange sight glass with lamp



Rechargeable battery

Standard type


Connection cable




Stainless steel Shell, DC 24V

W-Circular sight glass fittings to DIN 28120


Nominal diameter (DN)	Nominal pressure (PN) (bar)	Viewing diameter d ₁	Glass disc		Base flange and cover flange				Bolts or studs and nuts		
			d ₄	s	D	k	h ₁	h ₂	Number	Size	Tightening torque (Nm)
50	6	80	100	10	165	125	16	30	4	M 16	
	10			15							28
	16			15							32
80	6	100	125	15	200	160	20	30	8	M 16	20
	10			20							23
	16			20							
100	6	125	150	15	220	180	18	30	8	M 16	26
	10			20			22				30
	16			25			22				
125	6	150	175	20	250	210	18	30	8	M 16	32
	10			20			25				34
	16			25			25				
150	6	175	200	20	285	240	18	36	8	M 20	47
	10			25			30				54
	16			30			30				
200	6	225	250	25	340	295	20	36	8	M 20	
	10			30			35				63

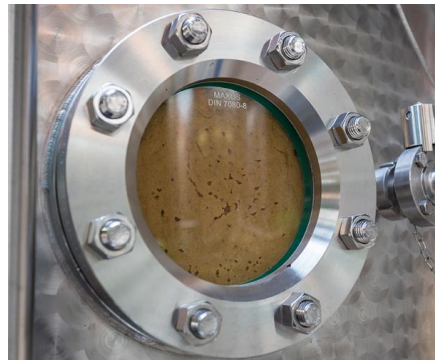

W-Rectangular sight glass fittings

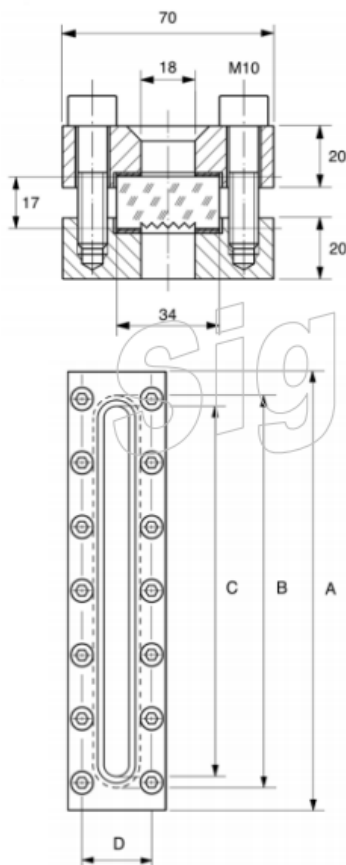

Size	Length A	Number of units	Free view C	Glass-length B	Bolts number	D
170	170	1	124	140	8	50
250	250	1	204	220	10	50
300	300	1	264	280	14	50
350	350	1	304	320	16	50
400	400	1	354	370	18	50
500	500	2	2 x 204	2 x 220	20	50
600	600	2	2 x 264	2 x 280	28	50
700	700	2	2 x 304	2 x 320	32	50
800	800	2	2 x 354	2 x 370	36	50
1000	1000	4	4 x 204	4 x 220	40	50

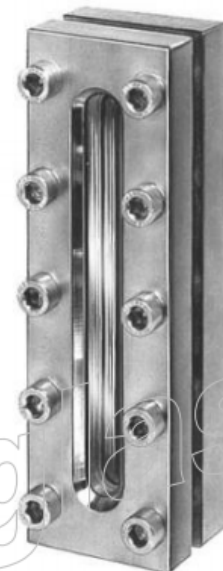

"Sigmaglas" Quality Sight Products

www.pstinter.com